


The Best Solution For Power System

FEATURES :

CE SERIES

- Compact Design
- Compact Size and Lightweight
- Easy to Use
- EMI/RFI Filter
- Build-in AVR
- Build-in Sealed Lead Acid Battery
- Audible and Visual Indicators
- Computer Interface Port RS232
- High Efficiency
- High Reliability

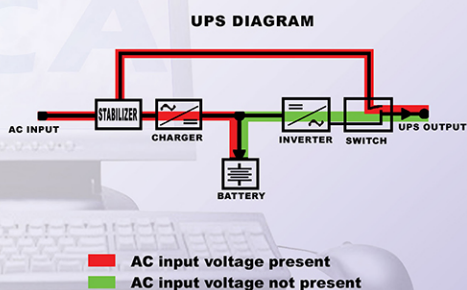

Protect your computers and sensitive equipments from any electrical disturbance.

Technical Specification

ITEM	UNITS	SPECIFICATION		REMARKS	
		CE600	CE1200		
MODEL		CE600	CE1200		
CAPACITY	VA/W	600/300	1200/600	MAXIMUM	
AC INPUT	VOLTAGE	V		160 - 250	
	CURRENT	A	1.6	2.9	MAX. LOAD & CHARGER
	FREQUENCY	Hz	50 ± 3		
	PROTECTION	A	3	5	FUSE
DC INPUT	INTERNAL BATTERY	1 x 12V, 7AH	2 x 12V, 7AH	SEALED LEAD ACID BATTERY	
INVERTER OUTPUT	WAVE FORM	SYNTHESIZED SINEWAVE		PWM	
	VOLTAGE	V	220 ± 5%		
	FREQUENCY	Hz	50		
	EFFICIENCY	%	> 80		
C H G	TYPE	CONSTANT VOLTAGE			
	VOLTAGE	V	13.6	27.2	
	CURRENT	A	1.5		
TRANSFER TIME	ms	≤ 4		MAXIMUM	
BACK UP TIME	min	10		NOMINAL LOAD	
INDICATOR		LED & BUZZER		SEE TABLE OF CONDITION	
OPERATION TEMPERATURE	°C	0 - 40			
DIMENSION	mm	345 x 95 x 158	390 x 145 x 195	D x W x H	
WEIGHT	Kg	7	15.2		

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

CONTACT PERSON :

481-41B0010-110