


The Best Solution For Power System

FEATURES :

CT SERIES

- EMI / RFI FILTER
- BUILD IN STABILIZER
- AUDIBLE AND VISUAL INDICATOR
- BUILD IN SLA BATTERY
- LEVEL BATTERY INDICATOR
- COMPUTER INTERFACE USB PORT
- COMPACT DESIGN
- MODEM PROTECTOR
- COMPACT SIZE and LIGHTWEIGHT
- EASY TO USE
- HIGH EFFICIENCY
- HIGH RELIABILITY

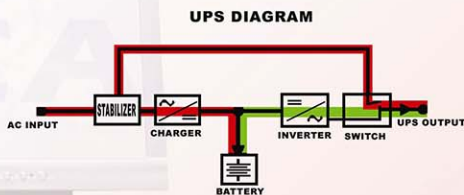


Protect your computers and sensitive equipments from any electrical disturbance.

Technical Specification

ITEM		UNITS	SPECIFICATION					REMARKS
MODEL			CT 382B	CT 682B	CT 1082B	CT 1382B	CT 1682B	
CAPACITY		VA/W	600/300	1200/600	2000/1000	2600/1300	3200/1600	MAXIMUM
AC INPUT	VOLTAGE	V	160 - 250					
	CURRENT	A	1.6	2.9	4.8	6.2	7.7	MAX. LOAD & CHARGER
	FREQUENCY	Hz	50 ± 3					
	PROTECTION	A	3	5	10	10	10	FUSE
DC INPUT	INTERNAL BATTERY		1 x 12V, 7 AH	2 x 12V, 7 AH	3 x 12V, 7 AH	4 x 12V, 7 AH	5 x 12V, 7 AH	SEALED LEAD ACID BATTERY
	PROTECTION	A	30	40	50	50	50	
INVERTER OUTPUT	WAVE FORM		SYNTHESIZED SINEWAVE (STEP WAVE)					PWM
	VOLTAGE	V	220 ± 5%					
	FREQUENCY	Hz	50					
	EFFICIENCY	%	> 80					
CHG	TYPE		CONSTANT VOLTAGE					
	VOLTAGE	V	13.5	27.0	40.5	54.0	67.5	
	CURRENT	A	1.5					
TRANSFER TIME		ms	≤ 4					
BACK UP TIME		min	10					NOMINAL LOAD
INDICATOR			LED & BUZZER					REFER TO CONDITION TABLE
OPERATION TEMPERATURE		°C	0 - 40					
DIMENSION		mm	340 x 95 x 145	390 x 145 x 195	430 x 175 x 230	445 x 175 x 230		D x W x H
WEIGHT		Kg	7	15	22	25	30	GROSS

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE



CONTACT PERSON :

481-4120010-111